


Art. 609 POLYPLAN Biogas Type II FR & Anti-Browning-System




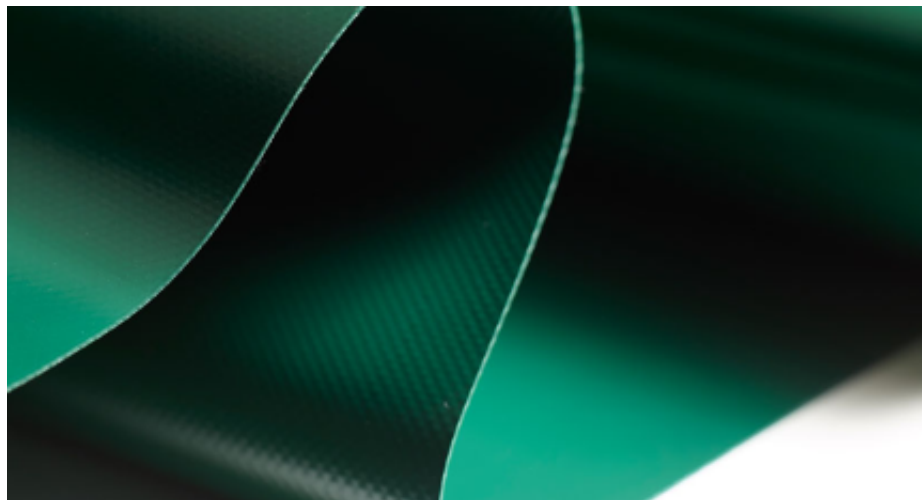


This Type II fabric, made of high-strength polyester yarns, is covered on both sides with a soft PVC-coating, especially developed for both acid and basic environments. Moreover, the specific lacquer ensures minimal methane migration and excellent processability. This flame-retardant membrane is certified according to EN 13501-1. The optional ABS finish reduces the discoloration of the surface caused by protein-rich substrates.

Weight:	26.5 oz/sqyd
Width:	118.1 inch
length:	218.7 yard
Type I-V:	Type II
Application:	Biogas
Surface:	high gloss, lacquered
Properties:	flame-retardant, fungicide finish

Type II biogas membrane for double shell biogas plants. Suitable for both inner and outer membranes. "Anti-Browning-System" (ABS): Biogas plants – in which not only silage is processed – can be affected by the "browning effect", a discoloration of the outer membrane. The optional ABS finish is a unique solution, the first of its kind on the market, which counteracts the discoloration of biogas membranes.

All colors

			
0A8	607	6A7	825
available dimensions upon request	available dimensions	available dimensions upon request	available dimensions
	Width [inch] length [yard]		Width [inch] length [yard]
	118.1 218.7		118.1 218.7

RAL color codes are informal indications only. The colors displayed on the screen may deviate from the original color of the product.