


## Art. 621 POLYPLAN Tent Floor FR

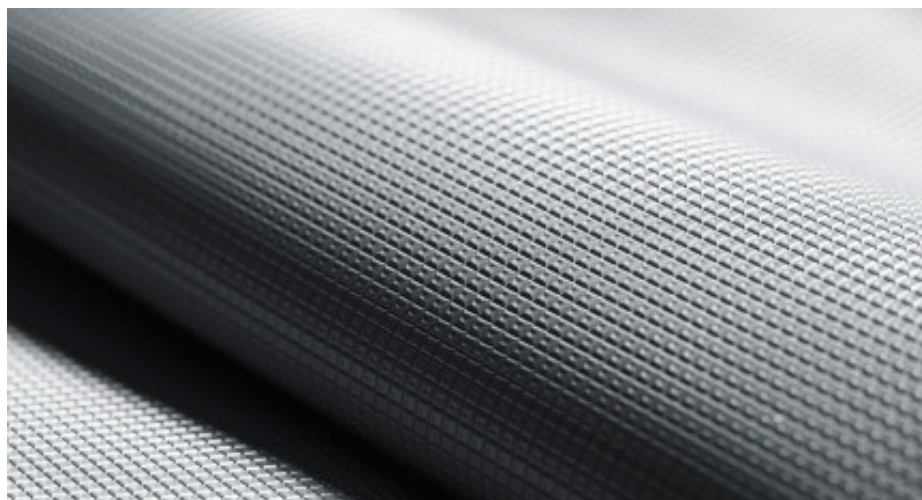

Polyplan Tent Floor FR is used as a tent floor. Contrary to smooth membrane surfaces, which can be very slippery, this product features a very structured surface that prevents slipping. Since both sides are coated, the fabric can be easily processed. The flame-retardant formulation allows a broad range of uses, from field-hospitals, over disaster relief shelters to tents for events.

Weight:	730 g/m <sup>2</sup>
dimensions:	upon request
Max. tensile strength:	2600/2500 N/5cm
Tear strength:	250/250 N
Application:	Halls & Tents
Surface:	antislip, special
Properties:	flame-retardant, fungicide finish

- Top-side with anti-slip embossing -> for safe walking
- Flame-retardant fabric -> compliance with current safety standards

### All colors



813  
available dimensions  
upon request

RAL color codes are informal indications only. The colors displayed on the screen may deviate from the original color of the product.